

Universal Ubiflex Solar PV Cable Entry

Solar Cable Entry, Air leakage excluder.

Applications


The cable entry tile for solar panels is UV resistant and suitable for most types of roofs, 15 - 55°.

It allows the passage of up to 6 cables with a diameter ranging from 4 to 8 mm.

Since the cables do not have to be passed between the tiles, there is no risk of tile breakage or cable wear over time. The Ubiflex skirt guarantees the tightness of the cable entry and perfectly matches the shape of the tile.

Advantages

- Universal design
- Air and watertight
- Easy and quick installation

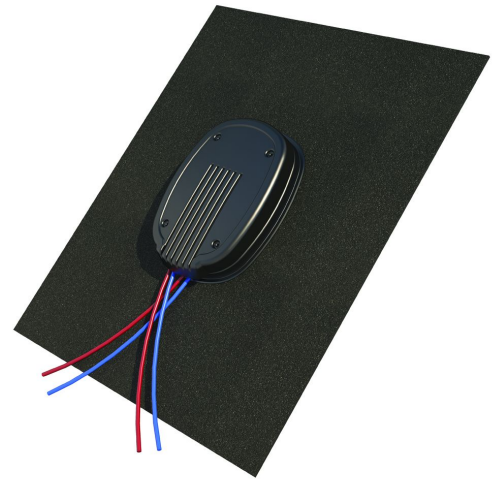

Technical Information

Photovoltaic Solar Cable Entry

Colour	Black
Dimensions	Width 500 mm, length 603 mm, Cap Width 247 mm
Materials	Cable cover: density polyethylene (HDPE) Skirt: Ubiflex

Dimensions

